
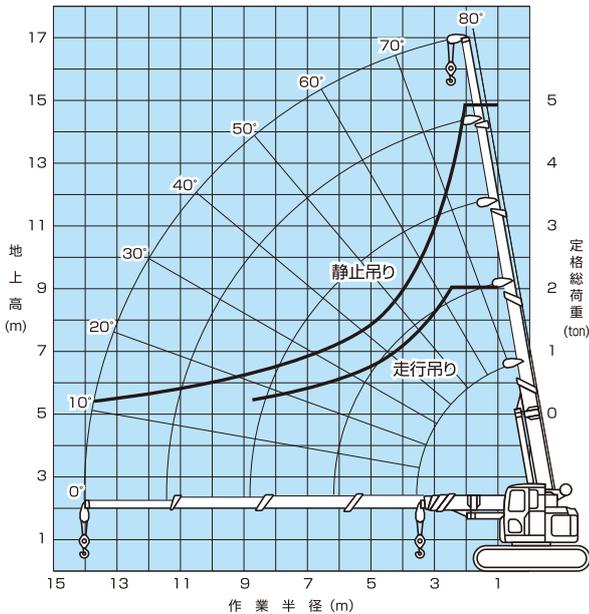
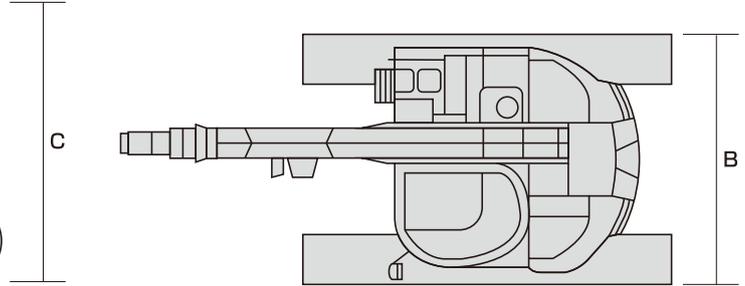


クローラークレーン

CK90UR

■CK90UR

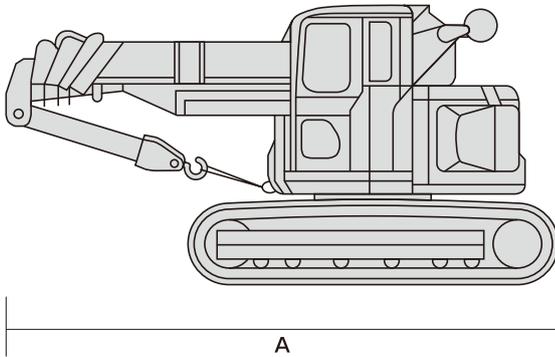

■定格総荷重

(単位:kg)

ブーム長さ	4.25m		6.88m		9.51m		12.14m		14.77m	
作業半径m	静止吊り	走行吊り	静止吊り	走行吊り	静止吊り	走行吊り	静止吊り	走行吊り	静止吊り	走行吊り
1.0	4,900	2,000								
1.5	4,900	2,000	4,900	2,000	2,600	1,400				
2.0	4,900	2,000	4,900	2,000	2,600	1,400	2,000			
2.1	4,900	2,000	4,900	2,000	2,600	1,400	2,000			
2.5	3,820	2,000	3,780	2,000	2,600	1,400	2,000	1,400		
3.0	2,920	1,600	2,990	1,640	2,330	1,250	2,000	1,400		
3.5	2,310	1,270	2,430	1,340	2,030	1,090	1,910	1,400		
4.0	3,740	2,000	3,850	2,000	2,600	1,400	2,000	1,400		
4.5			2,000	1,100	1,770	950	1,670	1,400		
5.0			3,130	1,720	2,600	1,400	2,000	1,400		
6.0			1,670	910	1,550	830	1,470	1,330		
7.0			2,650	1,450	2,580	1,400	2,000	1,400		
8.0			1,400	770	1,360	730	1,300	1,230		
9.0			2,250	1,230	2,340	1,260	2,000	1,400		
10.0			1,000	550	1,040	560	1,030	1,020		
11.0			1,700	930	1,800	960	1,720	1,400		
12.0			950	520	800	430	820	860		
13.0			1,650	910	1,440	770	1,470	1,270		
14.0					600	320	650	720		
15.0					1,180	640	1,230	1,130		
16.0					430	230	520	590		
17.0					1,030	550	1,040	990		
18.0							410	470		
19.0							890	860		
20.0							270	300		
21.0							730	650		
22.0								200		
23.0								500		
24.0								200		
25.0								500		
26.0								200		
27.0								500		
28.0								200		
29.0								500		
30.0								200		
31.0								500		
32.0								200		
33.0								500		
34.0								200		
35.0								500		
36.0								200		
37.0								500		
38.0								200		
39.0								500		
40.0								200		
41.0								500		
42.0								200		
43.0								500		
44.0								200		
45.0								500		
46.0								200		
47.0								500		
48.0								200		
49.0								500		
50.0								200		

■主要諸元

品番	CK90UR-3
最大吊り上げ能力 t×m	4.9×2.1 (走行吊り:2.0×2.5)
最大作業半径 kg×m	200×14.01
最大地上揚程(4本掛け) m	15.3
最大地下揚程(4本掛け) m	24.7
ブーム形式	箱形5段式(2段単独、3~5同時伸縮)
ブーム長さ m	4.25~14.77
ロープ速度(無負荷) m/min	104/150(4層目)
ブーム起こし速度 sec/度	20.5/-1°~80°
ブーム伸ばし時間(フルストローク) sec/m	25.4/10.52
走行速度(1速/2速) km/h	2.6/5.3
燃料タンク容量 ℓ	95
運転質量 kg	9700
接地圧 kPa(kgf/cm ²)	46.2(0.47)
運送時サイズ mm	5180×2320×2710